

TITAN 220

Highly efficient LED floodlight designed specifically for high mast and large area lighting.

Electronic, LED control gear driving 48 LEDs at 1.5A with asymmetrical distribution. IP67, Class I protection with 15kA Surge Protection.

Body: recyclable, extruded aluminium and powder-coated steel. Optic Enclosure: PMMA Weather-proof lenses. Reversible mounting bracket supplied, optional spigot adaptors available separately for post-top mounting.

CE LED IP67  



Technical data

Performance

Nominal Flux:	26,700 lm
Net Flux:	24,850 lm
Power Absorption:	228W

Optoelectronics

LED Type:	CREE XP-G3
Circuit Board:	MPCB 1.6mm
CRI:	70 ≤ R ≤ 90
Luminous Eff Loss:	< 1% per annum
Colour Temperature:	3,000K to 5,700K
Lumen Maintenance L90 B10	63,000h
Lumen Maintenance L70 B50	> 100,000h

Optics

Secondary Lens:	Refraction Array
System Treatment:	IP67, Anti-yellowing
Available optics:	FL / FH / SW / SM / ST
No of LEDs / module:	48
No of modules:	1

Luminaire Body

Structure:	Stainless steel
Metal coating:	Powder Painted
Heatsinks:	Extruded Aluminium
Bracket:	Central Bolt 20mm
Weight:	13.5 Kg
Installation height:	12m to 35m
Installation angle:	Tilt Adjustment 360°
Dimensions:	597L x 384W x 245H mm
Windage Area:	0.043m ²

Electronics

Voltage input:	90-305 VAC 50-60Hz
Active Power F.C.	0.95
Mean time to Failure:	200,000 hrs
Dimming Function:	1-10V / DALI
Surge Protection:	15kA, IEEE C62.41.2 Location Category C High
Insulation Class:	IEC Class I
IP Rating:	IP 67
Short Circuit Protection:	Auto-recovery
Over Heat Protection:	Drops output current
Rel. Humidity Range:	0% - 94%
Operating Temp:	-40°C up to +55°C

Normative references


- EN 60598-1: 2015 - Luminaires - Part 1: General requirements and tests
- EN 60598-2-5: 2015 Luminaires - Part 2-5: Particular requirements - Floodlights
- EN 62031: 2008 + A2:2015 - LED modules for general lighting - Safety specifications
- EN 60598-2-3: 2003 + A1: 2011 - Luminaires - Part 2-3: Particular requirements - Luminaires for road and street lighting
- EN 62493: 2015 Assessment of lighting equipment related to human exposure to electromagnetic fields
- EN 60529: 1992 + A2: 2013 - Degrees of protection provided by enclosures (IP Code)
- IEC 60068-2-52: 1996 Environmental test - Part 2: Tests - Test Kb - Salt mist cyclic (sodium chloride solutions)
- EN 55015: 2013 + A1: 2015 - Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
- EN 61547: 2009 - Equipment for general lighting purposes - EMC immunity requirements
- EN 61000-3-2: 2014 - Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)
- EN 61000-3-3: 2013 - Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
- EN 61643-11: 2012 - Low-voltage surge protective devices. Part 11: Surge protective devices connected to low-voltage power systems - Requirements and test methods
- IEEE C62.41.2-2002 - Recommended practice on characterization of surges in low-voltage AC power



Midstream Lighting Ltd, | Chesham Street, London SW1X 8ND, UK
Tel +44 207 584 8310 Email info@midstreamlighting.com
www.midstreamlighting.com



Dimensions

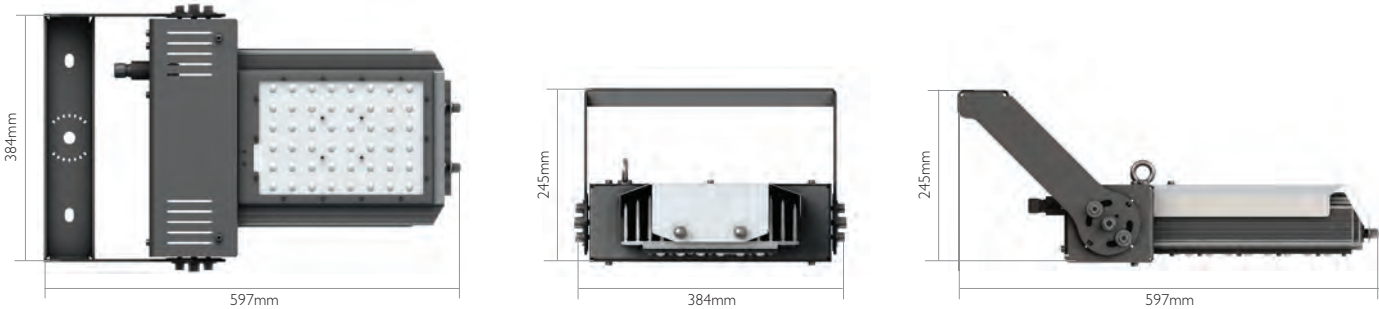

9<<1%45A 5645 .@F: : 2A?F " 9<<1%45A 9<D .@F: : 2A?F

(# @F: : 2A?60.9: 216B: () @?22A <=A60 (, @F: : 2A?60.9 D612

Ordering codes

Product Family	Power	Optic	CCT	Bracket	Control system	Body colour	Optional
T (Titan)	22	FL (Low Asymmetric)	A (5000K)	T (Flood Bracket)	I0 (I-10V)	k(Standard)	00 (No SPD)
		FH (High Asymmetric)	B (4000K)	P (Pole Bracket)	DA (DALI)	H (High Heat)	02 (15kA SPD)
		SW (Symmetric Wide)	C (3000K)		CW (Custom Wireless)	M (Military)	
		SM (Symmetric Med)	D (5700K)		CL (Custom Line)		
		ST (Street)					

Example: T22FHATDAT02
 Note: Specifications are subject to change without notice



Midstream Lighting Ltd, | Chesham Street, London SW1X 8ND, UK
 Tel +44 207 584 8310 Email info@midstreamlighting.com
 www.midstreamlighting.com

