Exit sign luminaire

LED Kwiklite



Installation notes

Wall or ceiling mount.

Power connection via knockouts in top & back of universal mounting bracket.

Supplied c/w lamp or LED strip.

Weatherproof enclosure can be quickly and easily fitted on site. (purchased individually)

Application

- Commercial offices areas
- Hospitals
- Shopping centres

Technical data

Operation mode	Maintained
Operation voltage	240V, 50Hz
Lamp detail	3W LED strip
	2 hour emergency duration
Standard materials	Body, mounting bracket & backing cover - flame retardant PC+ABS, white finish
	Diffuser- Injection moulded polycarbonate
	Legend insert - Flame retardant PVC
Weight	KLED - 1.5kg,
Warranty	3 year product warranty



The New Generation Kwiklite offers one of the highest classifications in today's market.

The New Generation Kwiklite provides a solution to most applications.

A unique combination of a powerful down light and evenly illuminated exit panel provides an exceptionally high level of threshold light over the surrounding floor area, minimising the quantity of additional emergency luminaires required.

- Maintained
- One box solution pictograph
- Long life, 50,000 hour energy efficient 3W LED
- 24m viewing distance
- IP65 enclosure available
- Slide on universal mounting bracket for wall or ceiling mount
- Options: Wire guard Cantilever bracket Legend kit - EXIT


Design features

- Downlight Optic Minimises the quantity of additional emergency luminaires required.
- Energy efficiency and longer life LED option offers up to 50,000 hours lamp life and is up to 60% more energy efficient than a 10W fluorescent tube.
- Slide on universal mounting bracket.
- Optional cantilever bracket.

Ordering information

KLED	3W LED 1 box solution exit, Ni-Mh
KLED-B	3W LED 1 box solution theatre exit, Ni-Mh
KLK-EX	Legend kit - EXIT
KLK-RM	Legend kit - PICTOGRAPH
WG-KWIK-CEILING	Wire guard - ceiling mount
WG-KWIK-WALL	Wire guard - wall mount
KLCL	Cantilever bracket
KLWP	IP65 weatherproof enclosure
KLWPWM	Wall mount bracket for KLWP
KLWPCL	Cantilever bracket for KLWP
KLED-CGL	3W LED 1 box solution exit, CGLine+ monitoring

Dimensions

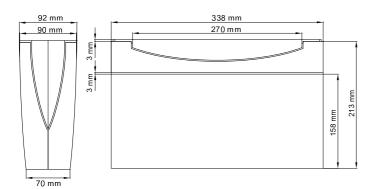

20